

# 6141.6141 Natural Coco Matting Specifications

rev. April 2019

Natural coconut fibers brush away dirt and moisture to preserve floors and lessen maintenance. Common uses are entryways, vestibules, and foyers with multi-directional traffic flow. Manufacturer recommends a loose lay installation in a recessed well. Vinyl reducer is available in black if there is not a well. The recommended subfloors are concrete or APA approved plywood underlayment.

Aronson's stocks color: Natural coco matting in rolls 6'-7" wide in 5/8" thickness and will cut to size for 24-hour turnaround. All other thicknesses and colors are special order and typically have a 1-week lead time.




Natural

## Specifications:

Typical Use:	Entry mats
Material:	Natural coir, coconut fibers
Backing:	Vinyl
Thicknesses:	Varies, see chart
Width:	6'-7"
Length:	approximately 39'-4"
Total weight:	1.36 lbs / sq ft (for 5/8", varies with thickness)
Testing passed:	ISO 1776 ISO 8543 ASTM D2859 LEED-NC v3

## Notes:

- Natural coco matting is made of coir (coconut fibers) yarns and no dyes, bleaches or coloring agents.
- There could be a color variation / streaking in the length.
- Shedding is common on new installations.
- Specs may vary at the time of order.

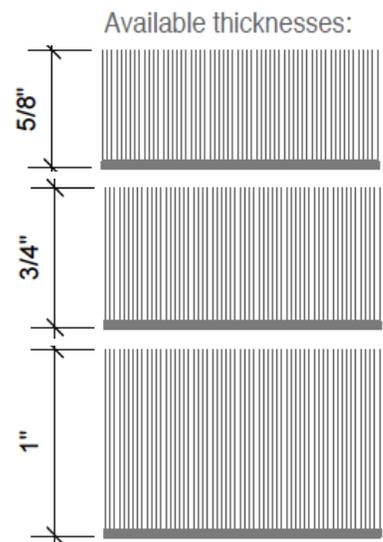

# 6141.6141 Natural Coco Matting Specifications

rev. April 2019

Dyed coco fibers brush away dirt and moisture to preserve floors and lessen maintenance. Common uses are entryways, vestibules, and foyers with multi-directional traffic flow.

Manufacturer recommends a loose lay installation in a recessed well. Vinyl reducer is available in black if there is not a well. The recommended subfloors are concrete or APA approved plywood underlayment.

Dyed coco matting available to order in 5/8" thickness only and typically has a 1-week lead time.



Medium Grey



Dark Grey



Brown



Charcoal

## Specifications:

Typical Use:	Entry mats
Material:	Natural coir, coconut fibers
Backing:	Vinyl
Thicknesses:	5/8" only
Width:	6'-7"
Length:	approximately 39'-4"
Total weight:	1.36 lbs / square foot
Testing passed:	ISO 1776 ISO 8543 ASTM D2859 LEED-NC v3



## Notes:

- Natural coco matting is made of coir (coconut fibers) yarns.
- There could be a color variation / streaking in the length.
- Dyed coco matting will fade if it is exposed to sunlight.
- Shedding is common on new installations.
- Specs may vary at the time of order.